

Special “Guide” Damper

The idea is the same of the standard damper; the special “guide” damper has a specific connection system, particularly appreciated in Scandinavian countries.

Materials of the special “guide” damper pitch 100 mm / 3.94 in	
Frame	Aluminium EN AW 6060 T6 extruded
Blade	Profile: aluminium EN AW 6060 T6 extruded
CPS9300000 Blade Components	Polyamide 6 + glass fibre 20%
CPS2007000 Blade Component	Low Temperature Polyamide 6 + glass fibre 20%
Gasket	Thermoplastic rubber
Handle	Die-casted aluminium EN AB 46100
Shaft	Square section 12 mm / 0.47 in – round section \varnothing 12mm / 0.47 in




Single Damper assembling Scheme





Double Damper assembling Scheme

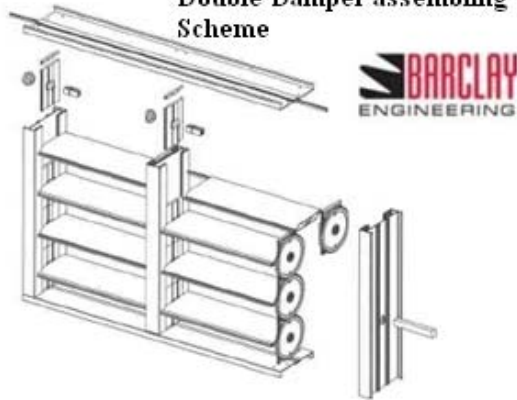

Special "Guide" lock:detail



Barclay Engineering, Canning Vale, WA
Tel: (618) 9456 0300, Fax: (618) 9456 0388
E-mail: info@barclayeng.com.au
Web: www.barclayeng.com.au