


## Standard Dampers

The Standard Damper is the base product for air adjustment units. Designed with extruded aluminum blades and frames, it can be supplied with handle and engine stand for the modulation of the flow. The nylon blade's gear system is installed behind the profiles. Its connection with the frames and the panels is always simple and fast, thus making installation times shorter.


<b>Materials of the Standard Damper pitch 100 mm / 3.94 in</b>	
<b>Frame</b>	Aluminium EN AW 6060 T6 extruded
<b>Blade</b>	Profile: aluminium EN AW 6060 T6 extruded
<b>CPS9300000 Blade Components</b>	Polyamide 6 + glass fibre 20%
<b>CPS2007000 Blade Component</b>	Low Temperature Polyamide 6 + glass fibre 20%
<b>Gasket</b>	Thermoplastic rubber
<b>Handle</b>	Die-casted aluminium EN AB 46100
<b>Shaft</b>	Square section 12 mm / 0.47 in – round section $\varnothing$ 12mm / 0.47 in



Single Damper assembling scheme

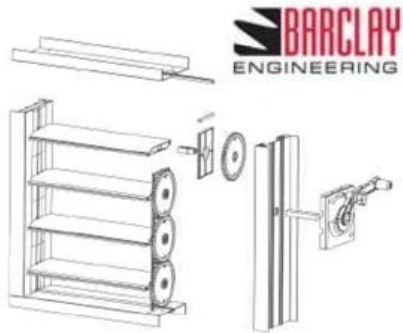

Double Damper assembling scheme

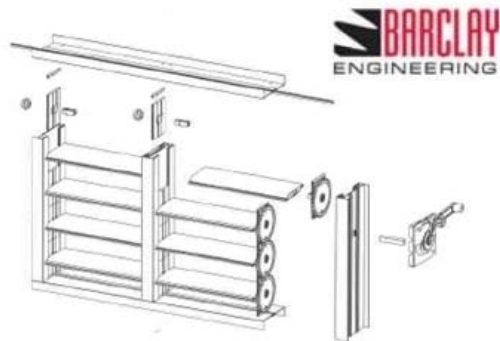

---

**Standard double  
damper assembled on  
AHU unit**



---

**Barclay Engineering, Canning Vale, WA**  
**Tel: (618) 9456 0300, Fax: (618) 9456 0388**  
E-mail: [info@barclayeng.com.au](mailto:info@barclayeng.com.au)  
Web: [www.barclayeng.com.au](http://www.barclayeng.com.au)